

WKS-SPEZIAL

Universal chain spray
-10 °C to +80 °C

The proven lubricant offers good adhesive strength and corrosion protection for dry applications in agriculture and industry. It forms the technological basis for the development of our high-performance lubricants such as WKS-C.

Properties

- Free of silicone, chlorine and soap, made from mineral oils, waxes and additives
- Good adhesive strength and creep capability
- Removal of old crusted and cracked residues
- Good corrosion protection
- Reduction of aging and wear processes
- Not suitable for moist environments
- No known adverse interactions with other materials



Areas of application


- Lubrication of drive, conveyor and lifting chains
- Industrial and agricultural plants and machinery
- Relubrication of mineral oil base initial lubrications
- Can also be sprayed overhead

Technical data WKS-Spezial

Colour / appearance		brownish
Odour		product-specific
Flashpoint	DIN EN/ ISO 2592	> 200 °C
Operative temperature range		-10 °C to +80 °C
Density at 15 °C solidified	DIN 51757	0,89 g/cm ³
Viscosity at 30 °C	DIN 51562	40 mm ² /s

Application tips for effective use

- Spray distance about 20 cm
- Targeted spraying of the joint spaces for optimum supply of bolts and bushes with lubricant

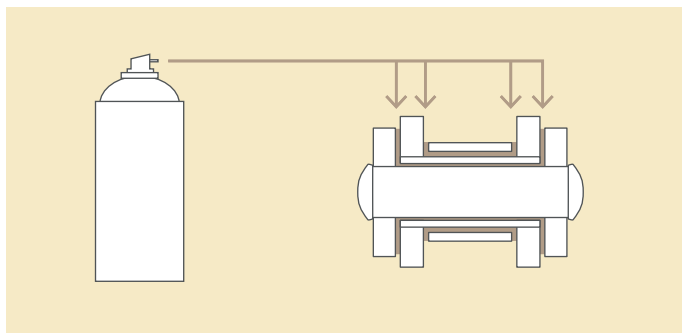

Notes

Safety data sheet for professional users on request.

The information and data contained in this data sheet have been prepared to the best of our knowledge and are checked continuously. They are based, among other things, on experience from numerous industrial companies. However, all information and data are without guarantee. Before using our products you should test them for their usability and convince yourself independently of the satisfactory performance. Application examples and suggestions on our part shall not imply infringement of any patent rights. **As of October 2020**

Wippermann jr. GmbH	Phone	+49 2331 782-0
Delsterner Str. 133	Fax	+49 2331 782-356
58091 Hagen	E-Mail	info@wippermann.com
Germany	Internet	wippermann.com